NIMIS 260 **7779** sku 1346003

astro



PRODUCT SPECIFICATION

GENERAL

LAMP

LIGHT SOURCE:

MAXIMUM WATTAGE:

LAMP INCLUDED?

DELIVERED LUMENS:

MAXIMUM LAMP LENGTH:

FINISH: MAIN MATERIAL: DIMENSIONS:

INSTALLATION ORIENTATION: CUT OUT HOLE: RECESS DEPTH: FIRE RATING: CABLE LENGTH: Polished Chrome Metal - Mild Steel H: 2005mm Dia: 260mm H: 78.94″ Dia: 10.24″ Ceiling Mount Not Applicable Not Applicable Not Applicable 1800mm/70.87″ GROSS WEIGHT: CLASS: LISTING LOCATION: FITTING METHOD: ADA COMPLIANT: IC RATING: VOLTAGE: To Be Advised cETLus (Class I) Dry 4" Octagon Box Not Applicable Not Applicable Mains 120 (V)

MACADAM ELIPSE: UGR: BEAM ANGLE: TILT ADJUSTMENT ANGLE: ROTATION ADJUSTMENT ANGLE: AVERAGE LIFESPAN: L70: Not Applicable Not Applicable Not Applicable Not Applicable Lamp Dependent Not Applicable

ELECTRICAL

COLOR TEMP:

CRI:

R9:

SWITCHED: DIMMABLE: DIMMING METHOD: DRIVER OUTPUT CURRENT: DRIVER OUTPUT VOLTAGE: Lamp Dependent No Yes Lamp Dependent

Not Applicable

Not Applicable

E26/Medium

120mm / 4.72"

Lamp Dependent

Lamp Dependent

Lamp Dependent

60W Max

No

SUPPLY FREQUENCY: DRIVER / BALLAST VOLTAGE: DRIVER AVERAGE LIFESPAN: EFFICACY:

DRIVER / BALLAST INCLUDED?

Not Applicable Not Applicable Lamp Dependent Not Applicable

.




SHADE INCLUDED

ADDITIONAL INFORMATION



BOX QUANTITY X4

PRODUCT ELEVATIONS

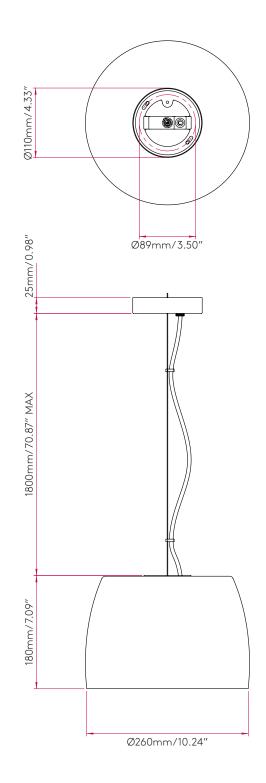

Astro Lighting Inc. 60 Broad Street Suite 3502 NY, NY 10004 T: +1 800-240 7071 (toll free) T: +1 732-428 5551 E: orders@astrolighting.com

lssue 1 / 22.04.16

www.astrolighting.com