ARTEMIS 900 **7240**

astro





PRODUCT SPECIFICATION

GENERAL

FINISH:Polished ChromeGROSS WEIGHT:2.65 (kg)MAIN MATERIAL:Metal - AluminiumCLASS:ETLus (Class I)

DIMENSIONS: H: 900mm W: 33mm D: 80mm **LISTING LOCATION:** Damp

H:35.43" W:1.30" D: 3.15" FITTING METHOD: 1/2 StubMount

INSTALLATION ORIENTATION: Wall Mount - Vertical / Horizontal Filting METHOD: 47 Octagon Box with included Canopy Kit

CUT OUT HOLE: Not Applicable ADA COMPLIANT: Ye

RECESS DEPTH: Not Applicable IC RATING: Not Applicable
FIRE RATING: Not Applicable VOLTAGE: Mains 120 (V)

CABLE LENGTH: Not Applicable

LAMP

 LIGHT SOURCE:
 Mid-Power LED
 MACADAM ELIPSE:
 3-Step

 MAXIMUM WATTAGE:
 3 x 3.2W
 UGR:
 Not Applicable

MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable TILT ADJUSTMENT ANGLE: LAMP INCLUDED? Yes (Integral) Not Applicable **DELIVERED LUMENS:** To Be Advised **ROTATION ADJUSTMENT ANGLE:** Not Applicable COLOR TEMP: AVERAGE LIFESPAN: 3000 (K) 60,000 (Hrs) CRI: To Be Advised

CRI: 80 **L70**: To **R9**: To Be Advised

ELECTRICAL

SWITCHED: No SUPPLY FREQUENCY: 50/60 (Hz)

DIMMABLE: No DRIVER/BALLAST VOLTAGE: 120 (V)

DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 50,000 (hrs)

DRIVER OLITPLIT CLIPPENT: 350 (mA)

FEEL CACY: To Be Advised


DRIVER OUTPUT CURRENT: 350 (mA) EFFICACY: To Be Advised DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER INCLUDED? Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY x 6

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes.

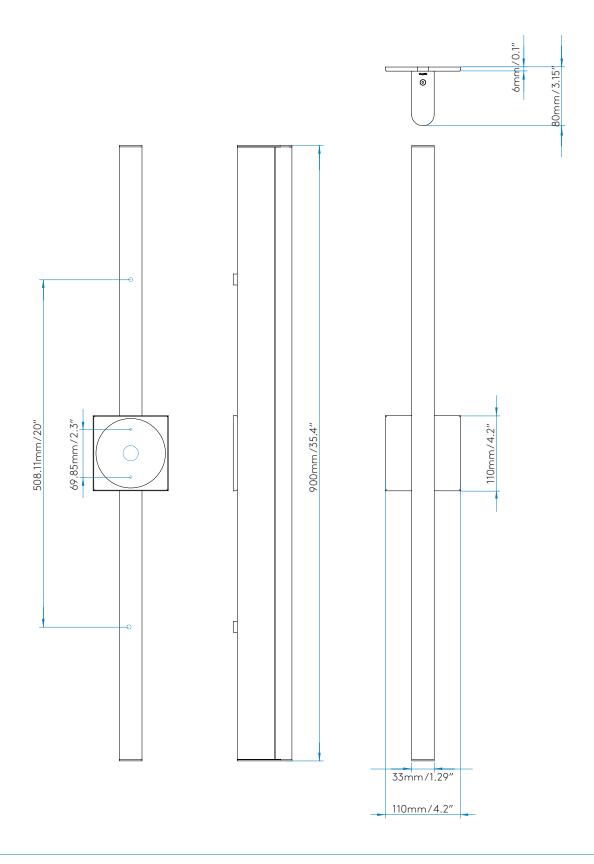

T: +1 800-240 7071 (toll free) T: +1 732-428 5551 E: infous@astrolighting.com us.astrolighting.com